

# YTPQC Offer

## Advanced Static Var Generator

### 220~480V/50(60)HZ

Low voltage network

www.ytelect.com



### General characteristics

#### Electrical Specifications

Rated voltage	220~480V ± 15%
Electric Connection	3 Phase 4 Wire/ 3 Phase 3 Wire
Rated Frequency	50/60Hz ± 5%
Compensation Mode	Reactive power compensation Harmonic mitigation 3 phase imbalance compensation Conventional capacitor switching
Harmonics Filtering Effect	Typically, THDi ≤ 5% at rated load (Even with most complex loads).
Filter range	2nd~25th order harmonics, Max 60% of rated capacity
Rated of Harmonic Reduction	≥ 97% (For typical harmonic order distortions)
Target Power Factor	Adjustable from -1.0 to +1.0
3 Phase Load Balancing Effect	≤ 5%, Mitigate negative and zero sequence
Neutral Filtering Capacity	3 times the rated filter current (in case of 4 wire device)
Reactive Power Compensation Capability	Both inductive and capacitive reactive power compensation
3 phase imbalance performance	≤ 5%(At the capacity is sufficient)
Imbalance Correction Capability	Mitigate negative and zero sequence
Overall Response time	≤ 5ms
Initial Response time	≤ 50us
Thermal Loss	≤ 2.5% of SVG rated capacity (kVA)
Output Current Limitation	Automatic (limited within 100% rated capacity)
Switching/control frequency	25.6kHz

#### Control Technology

Human Machine Interface (HMI)	7" HMI(Touched&Colorized LCD Screen)
Topology	3 Level IGBT
Control algorithm	Intelligent FFT, Self-adaptive control algorithm
Controller	DSP+FPGA
Control connection	Fiber or electrical connection
Communication protocols	Adopt Modbus remote communication protocol; communication interface adopts RS485 and CAN bus, supporting mobile phone APP operation.

#### Physical Specification

IP Grade of Cabinet	IP20
Cooling method	Speed regulation intelligent air cooling PWM Fans
Noise Level	<60db (<45db during low-speed operation)
Protection	Hardware protection, Software protection

#### Environmental Requirement

Ambient Temperature	-20~55 °C
Relative Humidity	Maximum 95%, without condensation
Altitude	≤ 2000 at rated capacity; appropriately reduce the capacity if it is > 2000(1% derating per 100m)

#### Environment

- Installation: Indoor/Outdoor
- Ambient temperature:-20~55°C
- Average daily temperature:35°C
- Humidity:95%max

#### Connection mode

- 3P4W
- 3P3W

#### Environment certifications

- ISO 9001:2015
- ISO 14001:2015
- CE
- Type Test Report

Compared with the traditional capacitor bank, YTPQC Advanced Static Var Generator has the advantages of fast response and high compensation accuracy without under-compensation or over-compensation problems, avoid resonance, etc.

Options available through page 2




## ASVG

## Advanced Static Var Generator

### References

Rated voltage	System voltage	Rated current	Type
220 VAC	171~269A	15A	YTPQC-ASVG/10
220 VAC	171~269A	30A	YTPQC-ASVG/20
220/400/480 VAC	171~269V/300~456V/356~515V	45A	YTPQC-ASVG/30
220 VAC	171~269A	60A	YTPQC-ASVG/40
220/400/480 VAC	171~269V/300~456V/356~515V	75A	YTPQC-ASVG/50
220/400/480 VAC	171~269V/300~456V/356~515V	112.5A	YTPQC-ASVG/75
220/400/480 VAC	171~269V/300~456V/356~515V	150A	YTPQC-ASVG/100

### Dimensions

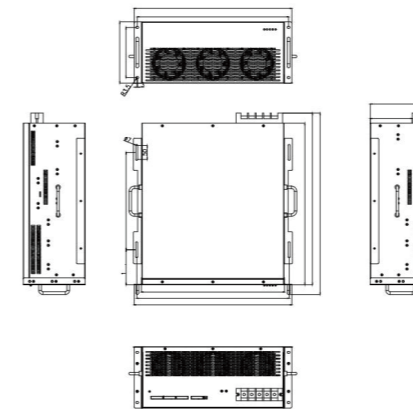

Type	Size (W*D*H)	Net Weight (kg)
YT-ASVG/30-4L	450*515*160	20
YT-ASVG/50-4L	450*515*160	26
YT-ASVG/75-4L	505*616*220	48
YT-ASVG/100-4L	505*616*220	55

### Accessories ordering codes

YTPQC-HMI	7 inch Human Machine Interface, Touched LCD Screen with matched cables
-----------	--

### Modules Pictures

Horizontal Rack Module



Wall Mounted Module

